


Temperature-Rise Doors

STANDARD MANUFACTURING CONSTRUCTION DETAILS

- 1-3/4" Thick Door (*standard)
- 18, 16, 14, 12 gauge Stainless Steel
- Alloy 304, 304L, 316, 316L
- Finish #4 Satin (*standard)
- Vertical Grain
- Seamless Edge Seam (welded edge)
- Temperature-Rise Core
- Closed Edge (Sealed and Polished available)

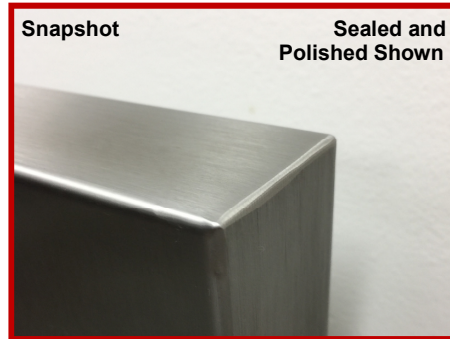



TEMPERATURE-RISE RATINGS (TRR)

A temperature-rise rating on a fire door is an addition to the fire-protection rating. It indicates that the non-fire side of the door will not exceed that temperature for 30 minutes during a standard fire test.

Used at interior exit stairways of multi-story buildings, ramps and exit passageways. Mandated by the local governing building code.

450 TRR Label: Temperature rise does not exceed 450° F(232 C)

250 TRR Label: Temperature rise does not exceed 250° F(121 C)

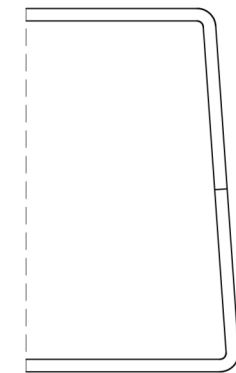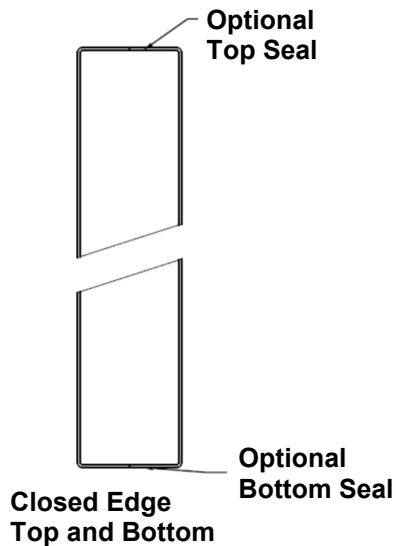

Continuous Weld Seamless Vertical Edge

>>All specifications are subject to change without notice<<

