


Pressure Resistant Doors


STANDARD MANUFACTURING CONSTRUCTION DETAILS

- 1-3/4" Thick Door
- 14, 12 gauge Stainless Steel
- Alloy 304, 304L, 316, 316L
- Finish #4 Satin (*standard)
- Vertical Grain
- Fully Welded Seamless On All Edges
- Proprietary Structural Steel Stiffened Core

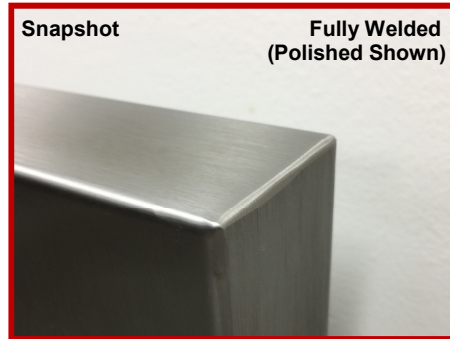


PRESSURE RESISTANT

CYCLIC PRESSURE: 73 PSF
 WIND 165-170 mph
 120 CYCLES PER DAY
 SERVICE LIFE EXPECTED 10 YEARS
 TOTAL CYCLES 438,000



The Method adopted for the fatigue analysis is the method provided by these standards and guidelines: AISC 2010, CISC, CAN/CSA S16-09, CSA 350W.

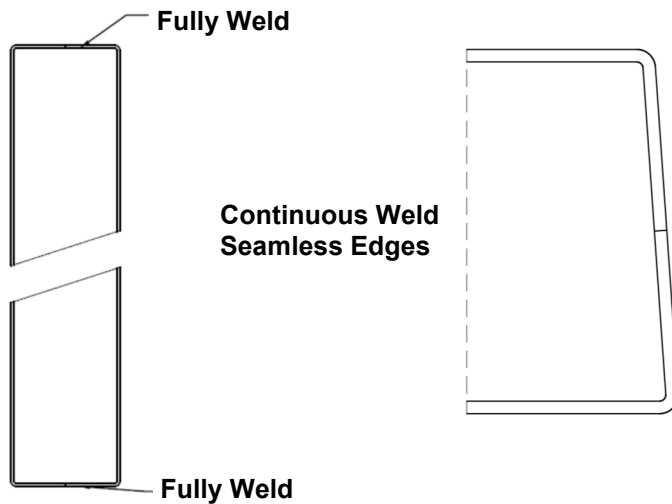

>>All specifications are subject to change without notice<<

