


Lead Lined (Radiation Shielding Doors)

STANDARD MANUFACTURING CONSTRUCTION DETAILS


- 1-3/4" Thick Door (*standard)
- 16, 14, 12 or 10 gauge Stainless Steel
- Alloy 304, 304L, 316, 316L
- Finish #4 Satin (*standard)
- Vertical Grain
- Fully Welded Seamless On All Edges
- Lead Lined Core
- Closed Edge (Fully Welded)

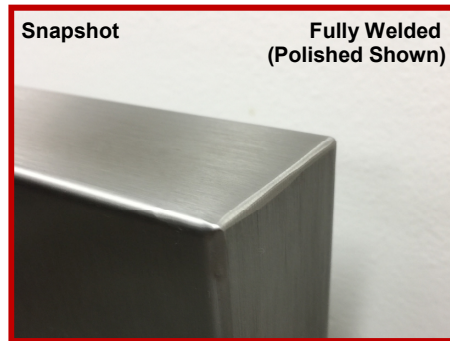

LEAD LINING OPTIONS (ASTM-B29 X-Ray Grade)

Radiation shielding doors are used anywhere radiation exposure may occur. Such as healthcare facilities, x-ray rooms, laboratories, military facilities and nuclear power plants.

- 1/32" Thick: 2 Lbs / Sq. Ft.
- 1/16" Thick: 4 Lbs / Sq. Ft.
- 1/8" Thick: 8 Lbs / Sq. Ft.
- 1/4" Thick: 16 Lbs / Sq. Ft.

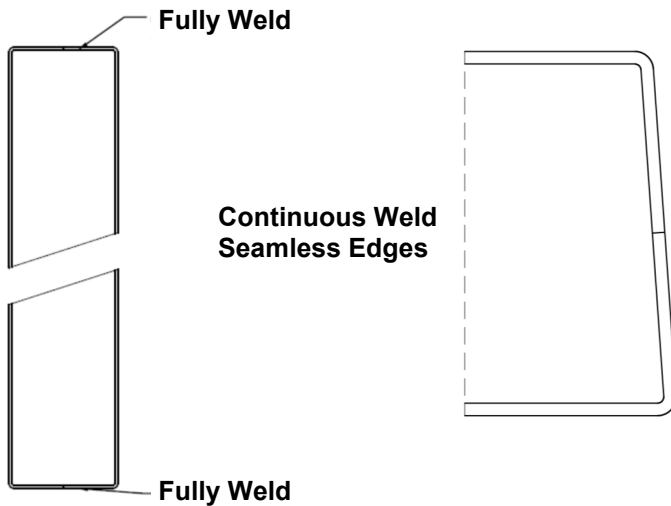

>>All specifications are subject to change without notice<<

