


Impact Resistant Doors

STANDARD MANUFACTURING CONSTRUCTION DETAILS


- 1-3/4" Thick Door (*standard)
- 16, 14, 12 or 10 gauge Stainless Steel
- Alloy 304, 304L, 316, 316L
- Finish #4 Satin (*standard)
- Vertical Grain
- Fully Welded Seamless On All Edges
- Impact Proprietary Steel Stiffened Core
- Closed Edge (Fully Welded)

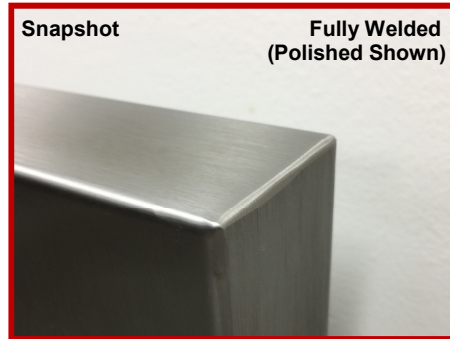

IMPACT RATINGS

<u>Impact</u>	<u>Grade</u>
Impact #1:	10 (59 ft-lbs)
Impact #2:	10 (59 ft-lbs)
Impact #3:	20 (89 ft-lbs)
Impact #4:	20 (89 ft-lbs)
Impact #5:	40 (148 ft-lbs)
Impact #6:	40 (148 ft-lbs)

ASTM F476-14 Section 17

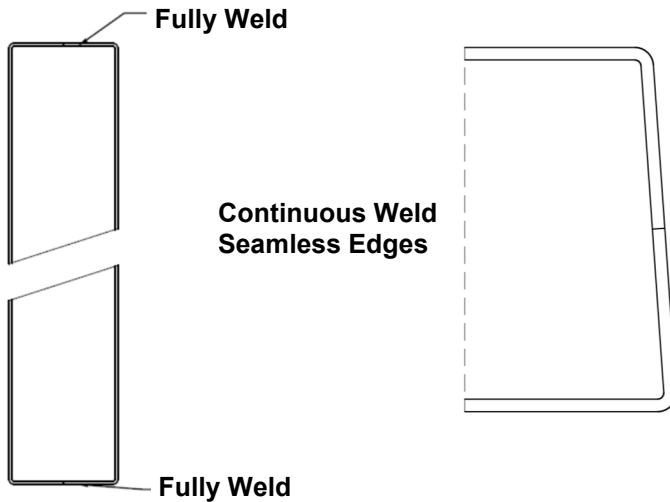

>>All specifications are subject to change without notice<<

